The Coalitional Switch off Game of Service Providers

Cengis Hasan[†], Eitan Altman[‡], Jean-Marie Gorce[†], Dimitrios Tsilimantos[†], and Manjesh K. Hanawal[‡]

[†]Inria, University of Lyon, INSA-Lyon, 6 Avenue des Arts 69621 Villeurbanne Cedex, France

[†]Phone: +33 4 72 43 64 85, Fax: +33 4 72 43 62 27

[‡]Inria, 2004 Route des Lucioles, 06902 Sophia-Antipolis Cedex, France

[‡]Phone: +33 4 92 38 77 86, Fax: +33 4 92 38 78 58

{cengis.hasan, eitan.altman, manjesh_kumar.hanawal}@inria.fr, {tsilimantos.dimitrios, jean-marie.gorce}@insa-lyon.fr

arXiv:1207.6103v1 [cs.GT] 25 Jul 2012

Abstract

This paper studies a significant problem in green networking called switching off base stations in case of cooperating service providers by means of stochastic geometric and coalitional game tools. The coalitional game herein considered is played by service providers who cooperate in switching off base stations. When they cooperate, any mobile is associated to the nearest BS of any service provider. Given a Poisson point process deployment model of nodes over an area and switching off base stations with some probability, it is proved that the distribution of signal to interference plus noise ratio remains unchanged while the transmission power is increased up to preserving the quality of service. The coalitional game behavior of a typical player is called to be *hedonic* if the gain of any player depends solely on the members of the coalition to which the player belongs, thus, the coalitions form as a result of the preferences of the players over their possible coalitions' set. We also introduce a novel concept which is called the Nash-stable core containing those gain allocation methods that result in Nash-stable partitions. By this way, we always guarantee Nash stability. We study the non-emptiness of the Nash-stable core. Assuming the choice of a coalition is performed only by one player in a point of time, we prove that the Nash-stable core is non-empty when a player chooses its coalition in its turn, the player gains zero utility if the chosen coalition is visited before by itself.

This work is supported by the ANR project ECOSCells. It was done within the INRIA - Alcatel Lucent Bell-Labs joint research laboratory.

I. Introduction

The term “green networking” is described in [1] as *the practice of selecting energy-efficient networking technologies and products, and minimizing resource use whenever possible*. It covers all dimensions of the network such as personal computers, peripherals, switches, routers, etc. Having a green network may allow to reduce CO_2 emissions and thus will help mitigating the global warming [2]. However, having a significant impact on the overall energy consumption call for improving the energy efficiency of all network components.

With a growing awareness to the dangers related to large scale energy consumption and drafting of many international agreements as well as legislation have reduced energy consumption in several sectors [3]. There is also a growing willingness to reduce energy consumption in wireless networks. On the one hand, wireless communication infrastructures, like the ones managed by mobile network operators, are a major contributor to the ever-increasing energy consumption of the ICT industry, which calls for the adoption of energy-efficient solutions in their design and operation. Moreover, the recent explosive growth of smartphones market adoption and the consequent mobile internet traffic requirements have prompted waves of research and standard development activities to meet the expected future demands in an energy-efficient manner. On the other hand, wireless networks will also be a major component of the communication infrastructure required by other “green” solutions for the efficient management of energy, since they enable practices like telecommuting (e.g., traffic reduction) and remote administration (e.g., the Smart Energy Grid), which are expected to significantly help reduce the environmental footprint of many human activities.

Energy consumption can be reduced by dynamically switching off/on cells, base stations (BSs) and other radio resources (e.g. transmit antennas), according to observed traffic load, resource utilization, quality and coverage. This paper studies the problem of cooperation of mobile network operators for switching off BSs in a setting that the energy saving by switching off BSs is sought to maximize. The assumption is that operators share their BSs and any customer can be associated to the BS of any operator. Indeed, we suppose that each operator has information about the average transmitted power of their BSs.

The cellular network model consists of BSs arranged according to some homogeneous Poisson point process in the Euclidean plane. The main weakness of the Poisson model is that because

of the independence of the Poisson point process, BSs will in some cases be located very close together but with a significant overlap area. This weakness is balanced by two strengths: the natural inclusion of different cell sizes and shapes and the lack of edge effects, i.e. the network extends indefinitely in all directions [5].

In this work, we do not study a deterministic selection of BS to serve a set of mobiles. We rather use stochastic geometry to evaluate the overall gain that can be reached with some cooperation. This work is thus based on optimizing the density of switched on BSs. The cooperation of operators is analyzed using the rules of hedonic coalition formation. A coalition formation game is said hedonic if the gain of any player depends solely on the members of the coalition to which the player belongs, thus, the coalitions form as a result of the preferences of the players over their possible coalitions' set. There are situations where a player evaluates a coalition partition as a whole, but generally it is more realistic when a player only formulates its preferences according to its own utilities.

A. Related Work

In [5], new general models for the multi-cell SINR using stochastic geometry are developed. Under very general assumptions, the downlink coverage probability, the mean rate, and then the coverage gain (and mean rate loss) from static frequency reuse are derived.

In [4], it is considered the energy consumption required for the downlink transmission in cellular networks was optimized by switching off BSs such as preserving the SINR distribution. Assuming full frequency reuse, each mobile connected to the nearest BS, all other BSs act as interferers. This work studied how an operator can reduce the energy consumption among its BSs by turning off a certain fraction of them, but still maintaining the same quality of service (defined as function of SINR) before the switch off process. The model of the location of the BSs is taken as a homogenous independently marked Poisson point process.

B. Contribution

In this paper, we analyze the problem in case of the cooperation between service providers (SPs) where any mobile is associated to the nearest BS of any SP. Utilizing the tools of Poisson point processes, in Section IV-A, we first summarize the proof that scaling the coordinates of $\mathbb{R}^2$ by $\sqrt{q}$ from the origin of a homogenous Poisson point process results in a thinned homogenous

Poisson point process with intensity modified by q. We derive the SINR distribution of the original network and show that increasing the transmission power by some factor of q the SINR distribution of the thinned network (obtained by scaling the locations of BSs) remains unchanged (Section IV-B). Moreover, in the case of non-cooperating SPs, the SINR distribution is obtained for the original and thinned network of SPs, respectively (Section V-B). We also find the SINR distribution of cooperation case which is used in the context of coalition formation of SPs. The operations on the network formed by cooperation are assumed to be run jointly by SPs meaning that they share their resources such that any mobile is tagged to the nearest BS of any SP. The maximal energy saving density of a cooperation is supposed to be the utility of the coalition. In Section IX, we derive the closed form results of the utility.

The most significant contribution of this work is the introduction of *the Nash-stable core*. This notion should be understood as not only specific to the considered game, but also applicable to any hedonic coalition formation game. Generally, *the core* is used in the context of *grand coalition* (the coalition when all players join the game). The core is a set including those allocation methods which guarantee the grand coalition. In other words, if the used allocation method lies in the core, then it satisfies the stability of grand coalition. In most of coalitional games, grand coalition can not be reached. Consequently, we come up with those games where the formation of coalitions is the main purpose. In a hedonic setting the stability of coalition formation is determined by some concepts such as *Nash stability, individual stability, contractual stability, core stability*. In the sequel, we consider the case where the Nash stability is used as a measure. We call *the Nash-stable core* the set of allocation methods that always result in Nash-stable coalition partitions. By this way, we always guarantee Nash stability (Section VIII).

II. Point Processes Preliminaries

Stochastic geometry is a rich branch of applied probability which allows the study of random phenomena on the plane or in higher dimensions. It is intrinsically related to the theory of point processes [18]. A point process (p.p.) Φ can be depicted as a *random collection of points* in space. More formally, Φ is a random, finite or countably-infinite collection of points in the space $\mathbb{R}_d$, without accumulation points [17]. A point measure is a measure which is locally finite and which takes only integer values on some space E. Each such measure can be represented as a

discrete sum of Dirac measures on E

$$\Phi = \sum_i \delta_{X_i}. \tag{1}$$

The random variables $\{X_i\}$ taking values in E are the points of Φ. The *intensity measure* Λ of Φ on B is defined as $\Lambda(B) = \mathbb{E}\Phi(B)$ denoting the expected number of points in $\Phi \cap B$ where B is assumed to be a Borel set.

A. Poisson Point Processes

A p.p. on some metric space E with intensity measure Λ is Poisson if for all disjoint subsets $A_1, \ldots, A_n$ on E, the random variables $\Phi(A_i)$ are independent and Poisson. For some $\mathrm{d}x$, if $\Lambda(\mathrm{d}x) = \lambda \mathrm{d}x$ is multiple of Lebesgue measure, we call Φ a *homogeneous Poisson p.p.* and λ is its intensity parameter [17].

Definition 1: **Superposition**: The superposition of Poisson point processes Φ_k with intensities Λ_k is the sum $\Phi = \sum_k \Phi_k$ with intensity measure $\sum_k \Lambda_k$ [17].

Definition 2: **Thinning**: The thinning of Poisson p.p. Φ with a *retention function* $q : \mathbb{R}^d \to [0, 1]$ is a p.p. given by

$$\Phi^q = \sum_i \varepsilon_i \delta_{X_i} \tag{2}$$

where the random variables $\{\varepsilon_i\}_i$ are independent given Φ, and $\mathbf{P}\{\varepsilon_i = 1|\Phi\} = 1 - \mathbf{P}\{\varepsilon_i = 0|\Phi\} = q(X_i)$. Thus, the retention probability q yields a Poisson p.p. of intensity measure $q\Lambda$ [17].

B. Marked point processes

In a marked point process (m.p.p.), a mark belonging to some measurable space and carrying some information is attached to each point. In our context, the points are the BSs and the marks are considered to be the transmitted power by each BS.

Consider a $d \geq 1$ dimensional Euclidean space $\mathbb{R}^d$ as the *state space* and a $\ell \geq 1$ dimensional *space of marks* $\mathbb{R}^\ell$. A marked p.p. $\tilde{\Phi}$ can be represented as a discrete sum of Dirac measures

$$\tilde{\Phi} = \sum_i \delta_{(X_i, M_i)} \tag{3}$$

where $\delta_{(X,M)}$ is the Dirac measure on the Cartesian product $\mathbb{R}^d \times \mathbb{R}^\ell$ with an atom at (X, M).

Definition 3 (from [17]): **Independent marking**: A marked p.p. is said to be independently marked (i.m.) if, given the locations of the points $\Phi = \{X_i\}$, the marks are mutually independent random vectors in $\mathbb{R}^\ell$, and if the conditional distribution of the mark M of a point $X \in \Phi$ depends only on the location of this point X it is attached to; i.e., $\mathbf{P}\{M \in \cdot|\Phi\} = \mathbf{P}\{M \in \cdot|X\} = F_X(\mathrm{d}M)$ for some *probability kernel or marks* $F_\cdot(\cdot)$ from $\mathbb{R}^d$ to $\mathbb{R}^\ell$.

Definition 4 (from [17]): An independently marked Poisson p.p. $\tilde{\Phi}$ with intensity measure Λ on $\mathbb{R}^d$ and marks with distributions $F_X(\mathrm{d}M)$ on $\mathbb{R}^\ell$ is a Poisson p.p. on $\mathbb{R}^d \times \mathbb{R}^\ell$ with intensity measure

$$\tilde{\Lambda}(A \times K) = \int_A \tilde{p}(X, K)\Lambda(\mathrm{d}x), \quad A \subset \mathbb{R}^d, K \subset \mathbb{R}^\ell. \tag{4}$$

where $\tilde{p}(X, K) = \int_K F_X(\mathrm{d}M)$. The independently marked Poisson p.p. can be seen as a transformation of the (non-marked) Poisson p.p. of intensity measure Λ on $\mathbb{R}^d$ by a probability kernel $p(X, A \times K)$ [17].

III. The Model

We assume full frequency reuse. Each mobile is associated with the BS being nearest to it. All BSs being out the nearest one cause interference to the mobile.

We consider a homogenous independently marked Poisson p.p. of BSs represented by $\tilde{\Phi} = \sum_i \delta_{(X_i, M_i)}$ where X_i shows the location of BS i, and M_i denotes the mark corresponding to the BS i. Indeed, a mark shows the energy profile of related SP. Consider a tagged mobile at an arbitrary point on the Euclidean plane, say the origin (Figure 1). Let p_0 denote the point in $\tilde{\Phi}$ which is the closest to it, and represents the BS to which it is connected. Let d_i be the distance of p_i to the origin. Moreover, suppose that average transmission power of a typical BS is P_t. This power should be understood as resulting from a long-term observation the SP performs. We consider an attenuation due to a path-loss with exponent α as well as the effect of fading denoted by the random variable h. The transmission power received at the tagged mobile from p_0 is thus given by $P_t h_0 d_0^{-\alpha}$. Thus, the total average interference from other BSs is $P_t \sum_{i \in \Phi \setminus p_0} h_i d_i^{-\alpha}$. Hence, the SINR at the mobile is [4]

$$\mathsf{SINR} = \frac{P_t h_0 d_0^{-\alpha}}{P_t \sum_{i \in \Phi \setminus p_0} h_i d_i^{-\alpha} + \sigma^2} = \frac{P_t h r^{-\alpha}}{I + \sigma^2}, \tag{5}$$

where σ^2 stands for additive noise variance.

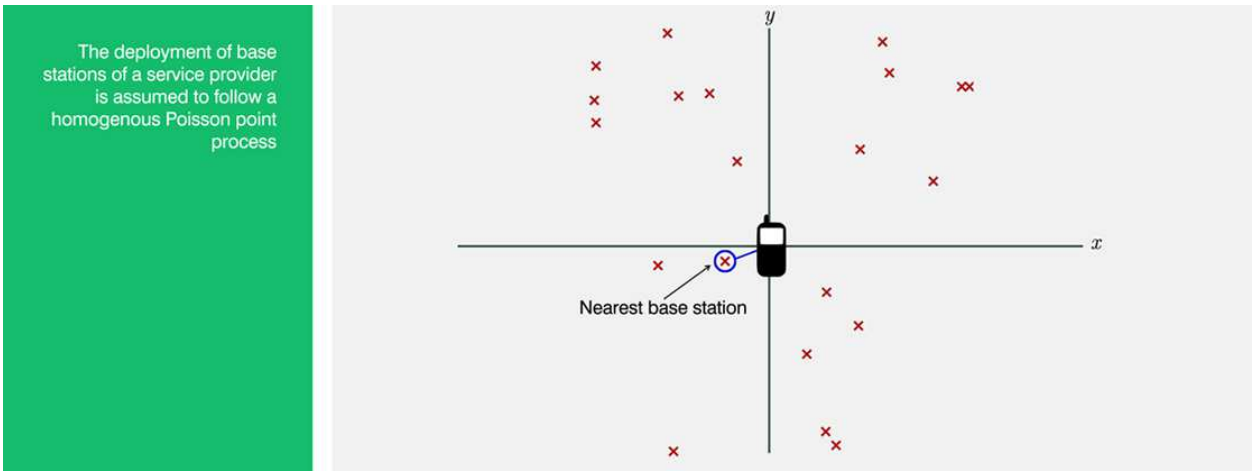


Fig. 1. Example deployment.

A. Base Station Energy Profile

The energy consumption model is mandatory to predict the power consumption of a typical BS as a function of the traffic load. In this paper, we adopt a linear energy profile model for a typical BS formulated as

$$P = P_0 + \beta P_{tot}, \tag{6}$$

where P_0 denotes the power consumption for operational tasks, β is the slope of the traffic-dependant part, and P_{tot} is the total transmitted power by the corresponding BS. Further, we assume that the average total transmission power is a function of the traffic intensity, given by

$$P_{tot}(T) = p + wf\left(\frac{T}{\lambda}\right), \tag{7}$$

where p is the minimum average total transmission power, e.g. signaling overhead in common pilot or control signal, w represents the power used per throughput (W/bps) as well as T is the traffic intensity (bps/m^2) and λ is the intensity of BSs ($points/m^2$) of the corresponding SP. In this work, we suppose that p and w are equal of each SP. Note that T/λ is the traffic per BS ($bps/point$). The function $f(T/\lambda)$ represents the power consumption as a function of the traffic.

Actually, different energy profiles could be proposed [6]–[8]. Here, since we focus to work on the coalitional game, we consider without loss of generality a simple linear model

B. SINR Distribution

By considering only the SINR, it means that we do not take into account any power control at the transmission. Here, the transmission power is constant for all mobiles.

First, we give the definition of coverage probability [5]:

$$p_C = \mathbf{P}\{\mathsf{SINR} > \rho\}, \tag{8}$$

where ρ is the target SINR that ensures the coverage. The distribution of the SINR is thus the complementary probability of the coverage probability, i.e. $p_{\mathsf{SINR}} = 1 - p_C$.

The distance between the origin and the nearest BS has the following probability density function [5]:

$$f(r) = e^{-\lambda\pi r^2} 2\pi\lambda r. \tag{9}$$

Conditioning on the nearest BS being at a distance r from the mobile, the probability of coverage is

$$p_C(\lambda) = \int_0^\infty \mathbf{P}\left\{ h > \frac{\rho(\sigma^2 + I)}{P_t r^{-\alpha}} \middle| r \right\} \exp(-\pi\lambda r^2) 2\pi\lambda r dr. \tag{10}$$

If we consider the case of Rayleigh fading, the random variable $h \sim \exp(\mu)$ follows an exponential distribution with mean $1/\mu$, and therefore [5]

$$p_C(\lambda) = \int_0^\infty \exp\left(-\frac{\mu\rho\sigma^2}{P_t r^{-\alpha}}\right) \mathcal{L}_I\left(\frac{\mu\rho}{P_t r^{-\alpha}}\right) \exp(-\pi\lambda r^2) 2\pi\lambda r dr, \tag{11}$$

where $\mathcal{L}_I(s)$ is the Laplace transform of random variable I given as

$$\begin{aligned}
\mathcal{L}_I(s) \triangleq \mathbf{E}\{\exp(-sI)\} &= \mathbf{E}_{\Phi,h_i}\left\{ \exp\left(-sP_t \sum_{i\in\Phi\setminus p_0} h_i d_i^{-\alpha} \right) \right\} = \mathbf{E}_\Phi\left\{ \prod_{i\in\Phi\setminus p_0} \mathbf{E}_h\left\{ \exp\left(-sP_t h d_i^{-\alpha}\right) \right\} \right\} \\
&= \exp\left(-\int_r^\infty \left(1 - \mathbf{E}_h\left\{ \exp\left(-sP_t h x^{-\alpha}\right) \right\}\right) 2\pi\lambda dx \right) \\
&= \exp\left(-2\pi\lambda \int_r^\infty \frac{x}{1 + \frac{\mu}{sP_t x^{-\alpha}}} dx \right)
\end{aligned} \tag{12}$$

where $s = \frac{\mu\rho}{P_t r^{-\alpha}}$ and the expectation over the fading and the p.p. are independent. Since the all h_i have the same distribution, we are able to calculate the expectation over only one variable denoted as h. Hence, the distribution of SINR can be calculated by

$$p_{\mathsf{SINR}}(\lambda) = 1 - p_C(\lambda) = 1 - 2\pi\lambda \int_0^\infty \exp\left(-\pi r^2 \lambda \left(1 + \frac{2\rho\, {}_2F_1\left(1, 1 - \frac{2}{\alpha}; 2 - \frac{2}{\alpha}; -\rho\right)}{\alpha - 2} \right) - \frac{\mu\rho\sigma^2}{P_t r^{-\alpha}} \right) r dr, \tag{13}$$

in which hypergeometric function ${}_2F_1(a,b;c;z)$ is a special function represented by the hypergeometric series defined for $|z|<1$ by the power series

$$ {}_2F_1(a,b;c;z)=\sum_{n=0}^{\infty}\frac{(a)_n(b)_n}{(c)_n}\frac{z^n}{n!} \tag{14}$$

provided that $c\neq 0,-1,-2,\ldots$. Here $(f)_n$ is the Pochhammer symbol defined by

$$(f)_n=\begin{cases}1, & \text{if } n=0,\\ f(f+1)\cdots(f+n-1), & \text{if } n>0.\end{cases} \tag{15}$$

For $\alpha=4$, the coverage probability can be found to be as following:

$$p_C(\lambda,\alpha=4)=\frac{\lambda}{2\sigma}\sqrt{\frac{\pi^3 P_t}{\mu\rho}}\mathrm{erfc}\left(\frac{\pi\lambda}{2\sigma}\sqrt{\frac{P_t}{\mu\rho}}\left(1+\sqrt{\rho}\tan^{-1}\left(\sqrt{\rho}\right)\right)\right)\times \exp\left(\left(\frac{\pi\lambda}{2\sigma}\sqrt{\frac{P_t}{\mu\rho}}\left(1+\sqrt{\rho}\tan^{-1}\left(\sqrt{\rho}\right)\right)\right)^2\right). \tag{16}$$

IV. Switching off Base Stations

In this section, we introduce the underlying approach to the problem in which the BSs are turned off. We assume that a SP has an observation that a typical BS is activated with some probability q. According to data traffic the SP turns on or off a BS. It gathers the information of this operation and set the activation probability q during that long enough period observations. However, we look for such an optimum value of q by which the SP maximizes its own energy saving introduced in Section V-D.

A. Scaling

In this section, we adopt the technic of thinning a p.p which is performed through scaling. We put forward in [4] this approach. Also, here, we give a proof which does not exist in [4].

Consider Figure 2 in which we depict the scaling effect on a p.p. (if no otherwise stated we assume that p.p. is always homogenous Poisson one). We scale up the p.p. from the origin. The dark red points correspond to the p.p. which is obtained after scaling of the initial one (showed by shiny red points).

Recall that we model the network as an independently marked Poisson p.p. $\tilde{\Phi}$. In the following, we derive the intensity measure of points of $\tilde{\Phi}^q$ being a thinned version of the initial one.

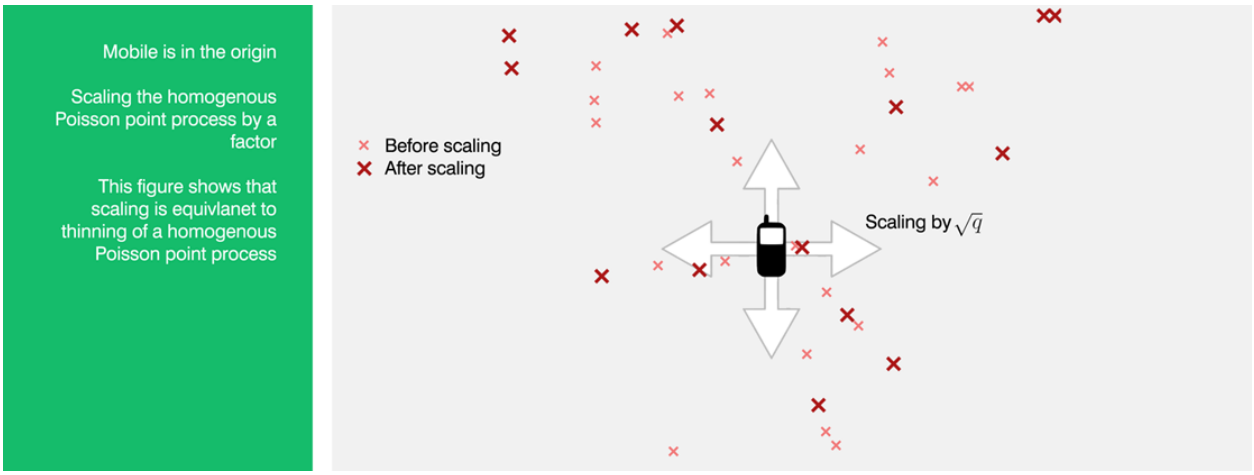


Fig. 2. Scaling.

Lemma 1: **Thinning through scaling**: *Choose some* $0 \leq q \leq 1$. *Scaling each coordinate by* $\sqrt{q}$ *in* $\mathbb{R}^2$ *results in a p.p.* Φ^q *of intensity measure* $q\Lambda$ *if the initial p.p.* Φ *has some intensity measure* Λ.

Proof: Let the coordinates of a typical point on some $E \subset \mathbb{R}^2$ be x and y, respectively. Scaling up each coordinate by q gives the new coordinates $x' = x/q$ and $y' = y/q$, respectively. We know that the distance from the origin before scaling is $d = \sqrt{x^2 + y^2}$. After scaling the distance becomes $d' = \frac{1}{q}\sqrt{x^2 + y^2}$ which means that each point moves away from the origin by

$$d' = \frac{d}{q}. \tag{17}$$

It is straightforward to understand that when scaling up only one coordinate by q results in a new p.p. with intensity measure $q\Lambda$. Then, we are able to state that scaling up each coordinate by q brings out a new p.p. with intensity measure $q^2\Lambda$.

Eventually, a new p.p Φ^q is obtained by scaling each coordinate by $\sqrt{q}$ of the original one Φ which corresponds to the deleting independently points with probability $1 - q$. Deleted points should be imagined as the BSs that are switched off. Consequently, the new intensity measure is $\Lambda^q = q\Lambda$. ■

B. SINR Distribution of the Scaled Network

Let us now calculate the new SINR distribution while the initial p.p. is scaled by $\sqrt{q}$. If we replace all d_i in (5) by d_i' and replace P_t by $\bar{P}_t$ then we can interpret the SINR distribution of the original p.p. as the one corresponding to a network where BSs are located according to a new p.p. with intensity parameter $\lambda^q = q\lambda$ where $\bar{P} = P_0 + \beta \bar{P}_{tot}$.

Using the relation of transmission power given in eq. (7), the coverage probability given in eq. (13) can be expressed as

$$p_C(\lambda) = 2\pi\lambda \int_0^\infty \exp\left(-\pi r^2 \lambda (1 + 2f(\alpha, \rho)) - \frac{\mu \rho \sigma^2}{P_t r^{-\alpha}}\right) r dr. \tag{18}$$

The scaling of initial process requires $\lambda \to q\lambda$ then $r \to r/\sqrt{q}$, $dr \to dr/\sqrt{q}$ which gives the following coverage probability

$$p_C(q\lambda) = 2\pi q\lambda \int_0^\infty \exp\left(-\pi \left(\frac{r}{\sqrt{q}}\right)^2 q\lambda (1 + 2f(\alpha, \rho)) - \frac{\mu \rho \sigma^2}{P_t q^{\alpha/2} r^{-\alpha}}\right) \frac{r dr}{q}. \tag{19}$$

It is straightforward that if we choose $P_t \to P_t q^{-\alpha/2}$, then $p_C(q\lambda) = p_C(\lambda)$. Moreover, the average total transmission power of a BS of the thinned network is obtained by $P_{tot} \to P_{tot} q^{-\alpha/2}$. This result indicates that the SINR distribution remains unchanged while the average total transmission power is increased by $q^{-\alpha/2}$ of a typical BS.

V. Multiple Service Providers

In this section, we extend the analysis to the multiple SPs case. We derive the formulation for two SPs but the results can be immediately obtained for more than two SPs case.

A. Non-cooperation of SPs

Assume that there are two SPs. We denote by Φ_1 and Φ_2 the location of the BSs of the SP 1 and SP 2 with intensity parameters λ_1 and λ_2, respectively where the energy profiles of SP 1 and SP 2 are given as P_1 and P_2, respectively. Furthermore, let the scaling factors of two SPs be $\sqrt{q_1}$ and $\sqrt{q_2}$. Hence, the p.p. after scaling of SP 1 and SP 2 is represented as $\Phi_1^{q_1}$ and $\Phi_2^{q_2}$, respectively. The points of network which is a result of the sum of thinned version of SP 1 and SP 2 can thus be represented as $\Phi_1^{q_1} + \Phi_2^{q_2}$ with intensity measure $q_1\Lambda_1 + q_2\Lambda_2$.

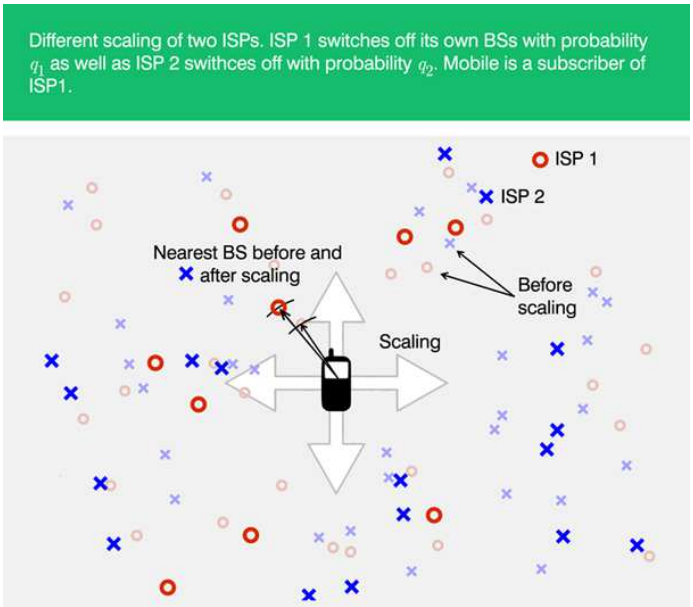


Fig. 3. Scaling in case of non-cooperation of two SPs.

Consider the Figure 3. We assume that the mobile is a customer of SP 1. Provided that SPs do not cooperate, we suppose that the thinning is performed independently by each SP. The SINR of the mobile before scaling can be calculated as following:

$$\mathsf{SINR} = \frac{P_{t,1} h_0 d_0^{-\alpha}}{P_{t,1} \sum_{i \in \Phi_1 \setminus p_0} h_i d_i^{-\alpha} + P_{t,2} \sum_{j \in \Phi_2} h_j d_j^{-\alpha} + \sigma^2}, \tag{20}$$

where d_0 denotes the distance of the mobile to the nearest BS of SP 1 as well as $P_{t,i}$ is the transmission power of SP i.

B. SINR Distribution in case of Non-cooperation

In order to derive the distribution of SINR when SPs do not cooperate, we first represent the SINR as following:

$$\mathsf{SINR} = \frac{P_{t,1} h r^{-\alpha}}{I_1 + I_2 + \sigma^2}. \tag{21}$$

The coverage probability conditioning to the nearest BS of SP 1 is formulated as

$$p_C(\lambda_1, \lambda_2) = \int_0^\infty \mathbf{P}\left\{ h > \frac{\rho(\sigma^2 + I_1 + I_2)}{P_{t,1} r^{-\alpha}} \middle| r \right\} \exp(-\pi \lambda_1 r^2) 2\pi \lambda_1 r dr, \tag{22}$$

where r is the distance between mobile and the nearest BS of SP 1. Then, the coverage probability can be expressed as

$$p_C(\lambda_1,\lambda_2)=\int_0^{\infty}\exp\left(-\frac{\mu\rho\sigma^2}{P_{t,1}r^{-\alpha}}\right)\mathcal{L}_{I_1}\left(\frac{\mu\rho}{P_{t,1}r^{-\alpha}}\right)\mathcal{L}_{I_2}\left(\frac{\mu\rho}{P_{t,1}r^{-\alpha}}\right)\exp(-\pi\lambda_1 r^2)2\pi\lambda_1 r dr. \tag{23}$$

The Laplace transform of the interferences arising due to SP 1 and SP 2 are given as

$$\mathcal{L}_{I_1}(s)=\exp\left(-2\pi\lambda_1\int_r^{\infty}\frac{x}{1+\frac{\mu}{sP_{t,1}x^{-\alpha}}}dx\right), \tag{24}$$

$$\mathcal{L}_{I_2}(s)=\exp\left(-2\pi\lambda_2\int_0^{\infty}\frac{x}{1+\frac{\mu}{sP_{t,2}x^{-\alpha}}}dx\right), \tag{25}$$

respectively, where $s=\frac{\mu\rho}{P_{t,1}r^{-\alpha}}$. Note that the lower limit of the Laplace transform integral of I_2 is zero which takes into account the interference that occurs from the points of SP 2 being nearer than the nearest BS of SP 1. Thus, the following integral gives the coverage probability of non-cooperation case

$$p_C(\lambda_1,\lambda_2)=2\pi\lambda_1\int_0^{\infty}\exp\left(-\pi r^2\lambda_1\left(1+\frac{2\rho\,{}_2F_1\left(1,\frac{\alpha-2}{\alpha};2-\frac{2}{\alpha};-\rho\right)}{\alpha-2}+\frac{2\pi\frac{\lambda_2}{\lambda_1}\left(\frac{P_{t,1}}{\rho P_{t,2}}\right)^{-2/\alpha}}{\alpha\sin\left(\frac{2\pi}{\alpha}\right)}\right)-\frac{\mu\rho\sigma^2}{P_{t,1}r^{-\alpha}}\right)rdr. \tag{26}$$

For specific values of α, closed form coverage probability expressions can be found. For example, let $\alpha=4$. The coverage probability can be given by

$$p_C\left(\lambda_1,\lambda_2,\alpha=4\right)=\frac{\lambda_1}{2\sigma}\sqrt{\frac{\pi^3P_{t,1}}{\mu\rho}}\mathrm{erfc}\left(\frac{\pi^2\ \lambda_2\sqrt{\rho P_{t,2}}+2\pi\lambda_1\sqrt{P_{t,1}}\left(\sqrt{\rho}\tan^{-1}\left(\sqrt{\rho}\right)-1\right)\right)}{4\sigma\sqrt{\mu\rho}}\right)\times \exp\left(\left(\frac{\pi^2\lambda_2\sqrt{\rho P_{t,2}}+2\pi\lambda_1\sqrt{P_{t,1}}\left(\sqrt{\rho}\tan^{-1}\left(\sqrt{\rho}\right)-1\right)}{4\sigma\sqrt{\mu\rho}}\right)^2\right). \tag{27}$$

The coverage probability of the networks of SP 1 and SP 2 scaled by $\sqrt{q_1}$ and $\sqrt{q_2}$, respectively can be calculated by the following integral,

$$p_C(q_1\lambda_1,q_2\lambda_2)=2\pi q_1\lambda_1\int_0^{\infty}\exp\left(-\pi\left(\frac{r}{\sqrt{q_1}}\right)^2q_1\lambda_1\left(1+\frac{2\rho\,{}_2F_1\left(1,\frac{\alpha-2}{\alpha};2-\frac{2}{\alpha};-\rho\right)}{\alpha-2}+\frac{2\pi\frac{q_2\lambda_2}{q_1\lambda_1}\left(\frac{P_{t,1}}{\rho P_{t,2}}\right)^{-2/\alpha}}{\alpha\sin\left(\frac{2\pi}{\alpha}\right)}\right)-\frac{\mu\rho\sigma^2}{P_{t,1}\left(\frac{r}{\sqrt{q_1}}\right)^{-\alpha}}\right)\frac{rdr}{q_1}. \tag{28}$$

By increasing the transmission power of SP 1 and SP 2 as $P_{t,1} \to P_{t,1} q_1^{-\alpha/2}$, $P_{t,2} \to P_{t,2} q_2^{-\alpha/2}$, respectively, the SINR distributions of two SPs do not change in the non-cooperation case.

C. Cooperation of SPs

In the case of cooperation among the SPs, any mobile is associated to the nearest BS of any SP. Thus, SPs share their resources in order to obtain a better SINR level for each customer. By this way, the power consumption can be lowered providing a "green" approach to the BS deployment.

Let $S = (1, 2)$ show the coalition of SP 1 and SP 2. We assume that in case of a cooperation the operators control jointly the network such that the activation probability q_S of a BS is determined in order to maximize the energy saving density. Formally, the traffic and the network intensity that reveals by cooperation are supposed to be additive, i.e. $\sum_{i \in S} T_i$ and $\sum_{i \in S} \lambda_i$, respectively. It is also considered that the network formed by cooperation has the equal average total transmission power per BS given by

$$P_{tot}^S = p + wf\left(\frac{\sum_{i \in S} T_i}{\sum_{i \in S} \lambda_i}\right). \tag{29}$$

Thus, the SINR can be expressed as following:

$$\mathsf{SINR} = \frac{P_t^S h_0 d_0^{-\alpha}}{P_t^S \sum_{i \in \Phi_S} h_i d_i^{-\alpha} + \sigma^2}, \tag{30}$$

where $\Phi_S = \Phi_1 + \Phi_2$ denotes the p.p. which is a result of sum of the p.p. of SP 1 and SP 2 having the intensity $\lambda_1 + \lambda_2$ which is a direct result of superposition property stated in Definition 1, and P_t^S is the transmission power between mobile and the tagged BS in case of cooperation.

Scaling each coordinate by $\sqrt{q_S}$ results in a network which corresponds to a thinned one as a consequence of cooperation. The points of the network resulting from the scaling is denoted as Φ^{q_S} which has the intensity measure $q_S(\lambda_1 + \lambda_2)$. Thus, we can adopt the same result obtained for the single operator where the transmission power is adjusted as $P_t^S \to P_t^S q_S^{-\alpha/2}$. Moreover, the energy profile of a typical BS of SP i is given by

$$P_i^S = P_{0,i} + \beta_i P_{tot}^S. \tag{31}$$

We also denote by $\bar{P}_i^S = P_{0,i} + \beta_i P_{tot}^S q_S^{-\alpha/2}$ the energy profile of SP i corresponding to the thinned network.

D. Energy Saving

We are interested to see what is the energy saving by switching off BSs (independently) with probability $1-q_S$, given that at the same time we increase the transmission energy to compensate for decreasing the resources in a way that the probability distribution of the SINR is unchanged.

Now, we introduce the energy saving density when SPs form a coalition S. The power consumption density of SP i can be calculated by $\lambda_i P_i^S$. We can also calculate the power consumption density by $q^S \lambda_i \bar{P}_i^S$ when considering the thinned network. So, in case of coalition S, the energy saving density is characterized as $\sum_{i\in S} \lambda_i P_i^S - q_S \sum_{i\in S} \lambda_i \bar{P}_i^S$ resulting in following function

$$G(S) = (1-q_S) \sum_{i\in S} \lambda_i P_{0,i} + \left(1 - q_S^{1-\alpha/2}\right) P_{tot}^S \sum_{i\in S} \lambda_i \beta_i. \tag{32}$$

Let us represent by $U_S = \sum_{i\in S} \lambda_i P_{0,i}$ and $V_S = P_{tot}^S \sum_{i\in S} \lambda_i \beta_i$. The meaning of these variables can be interpreted as following: U_S corresponds to the energy saving density of the operational power costs arising due to the BSs of coalition S as well as V_S is the energy saving density due to transmission power in case of coalition S. Then, the energy saving density can be expressed as

$$G(S) = (1-q_S) U_S + \left(1 - q_S^{1-\alpha/2}\right) V_S. \tag{33}$$

VI. Cooperation Behavior in the context of Coalitional Games

Cooperation among agents (here, those correspond to SPs) is significant because interaction between them would lead to different factions (coalitions among agents). The analysis of cooperation is performed using coalitional games in general. At the end of cooperation, the agents obtain some gain (utility). The allocation of the gain is important in determining the stability of coalition partition. Coalitional game theory studies mainly two cases: (i) how to find such gain allocation methods that would guarantee the stability of grand coalition (all players are in the same coalition), (ii) how to determine the coalition partition when grand coalition is not possible. The latter is called as *coalition formation games* introduced in Section VII-D. In most cases, the grand coalition cannot be reached. Therefore, coalition formation games are used to analyze the cooperation behavior of agents. Then, the question arises: *which coalition should be joined?* Applying selfish decisions to coalition formation is called *hedonic coalition formation*

as well as one could determine the coalition partition according to global interests instead of egoistic, which is named as *non-hedonic* [16].

In this paper, we study the case in which the SPs determine their decisions in a hedonic setting. To this end, the coalition partitions are found by using the tools of hedonic coalition formation games. We also put forward a new concept called *the Nash-stable core* which includes those gain allocation methods that always result in the partitions from which none deviate. In the following sections, we introduce the basics of coalitional games and our achievements.

VII. Coalitional Game Preliminaries

We represent a coalitional game in utility function form as $\langle N, u\rangle$ where $N = (1, 2, \dots\ n)$ is a non-empty finite set of players who consider different cooperation possibilities, and $u : 2^N \to \mathbb{R}$ is the utility function. Each subset $S \subset N$ is referred to as a *crisp coalition*. The set N is called the *grand coalition* and $\emptyset$ is called the *empty coalition* where $u(\emptyset) = 0$. We denote the collection of coalitions, i.e. the set of all subsets of N by 2^N. These games are usually called coalitional games with transferable utility (TU games, for short) where its members can jointly guarantee themselves and which can be transferred without loss between them [14].

In TU games, it is supposed that the utility is freely transferable from one player to another. This is, in particular, possible in the presence of "ideal money", i.e. commodity whose utility is directly proportional to quantity, and independent of any other assets, which a player may have. In general, unfortunately, the situation is not so simple - players utility for money may be not linear, it may depend on other assets of players, or, in some cases, side payments may even be forbidden. In such situations it is better to represent each coalitions possibilities not by a single number, but rather by a set of all payoff vectors, which the coalition can obtain for its members. We then speak about coalition games with nontransferable utility (NTU games, for short) [14]. Further discussion about NTU games can be found in [15].

A. Properties of Utility Function

Let us now mention about the properties of utility function.

Definition 5: **Monotonicity**: A utility function is said to be monotonic if it satisfies

$$u(S) \geq u(T), \quad \text{if } T \subseteq S. \tag{34}$$

It means that the utility increases or remains unchanged while a coalition expands.

Definition 6: **Superadditivity**: A utility function is said to be superadditive if it satisfies

$$u(S \cup T) \geq u(S) + u(T), \quad \text{if } T \cap S = \emptyset, \quad \forall S, T \subseteq N. \tag{35}$$

From the superadditivity, we infer that whenever two separate coalitions combine, the utility is higher or equal compared to the sum while coalitions are separated. The superadditivity property determines if the grand coalition can be reached. In other words, all players have incentive to join the game provided that the utility increases by combining separate coalitions in a unique coalition.

B. Utility Allocation

In this section, we mention about the sharing the total gain u to the players.

The utility of player $i \in S$ is denoted by ϕ_i^S. The meaning is that what player i gains being in coalition S. The sum of utilities in a coalition S must be equal to the total utility which is called *efficiency*: $\sum_{i \in S} \phi_i^S = u(S)$. The gain vector of player i for all possible coalitions is denoted by $\phi_i \in \mathbb{R}^{2^{n-1}}$. For example, let $N = (1, 2)$ then $\phi_1 = \left\{\phi_1^{(1)}, \phi_1^{(1,2)}\right\}$. Moreover, we call as *allocation method* $\phi \in \mathbb{R}^{n2^{n-1}}$ the gains of all possible coalitions of all players, i.e., $\phi = \{\phi_1, \phi_2, \ldots, \phi_n\}$.

C. The Core

The core is the set of allocation methods that guarantee the grand coalition. Therefore, no coalition has incentive to leave the grand coalition and receive a larger payoff. Formally, the core is defined as following:

$$\mathcal{C} = \left\{ \phi \in \mathbb{R}^n \middle| \sum_{i \in N} \phi_i = u(N), \quad \sum_{i \in S} \phi_i \geq u(S), \forall S \subset N \right\}. \tag{36}$$

In general, the core can be found by the following linear program:

$$\min_{\phi} \sum_{i \in N} \phi_i, \quad \text{subject to} \quad \sum_{i \in S} \phi_i \geq u(S), \forall S \subseteq N. \tag{37}$$

Provided that the above linear program is feasible, then the core is said to be non-empty [12].

D. Coalition Formation Games

In some cases acting together may be difficult, costly or illegal, or the players may for various personal reasons not wish to do so [13]. Then, the question arises: how the coalitions does have to be formed in order that the players do not deviate from?

A coalition formation game is given by a pair $\langle N, \succ \rangle$, where $\succ = (\succeq_1, \succeq_2, \ldots, \succeq_n)$ denotes the preference profile, specifying for each player $i \in N$ his preference relation $\succeq_i$, i.e. a reflexive, complete and transitive binary relation.

Definition 7: A coalition structure or a *coalition partition* is defined as the set $\Pi = \{S_1, \ldots, S_l\}$ which partitions the players set N, i.e., $\forall k$, $S_k \in N$ are disjoint coalitions such that $\bigcup_{k=1}^{l} S_k = N$. Given Π and i, let $S_\Pi(i)$ denote the set $S_k \in \Pi$ such that $i \in S_k$ [10].

We may think of situations where a player evaluates a coalition partition as a whole, but generally it is more realistic when a player only formulates its preferences according to its own utilities. Such coalition formation games are called *hedonic*. In [13], Drèze and Greenberg introduced the hedonic aspect in players preferences in a context concerning local public goods. Moreover, purely hedonic games and stability of hedonic coalition partitions were studied by Bogomolnaia and Jackson in [10].

Definition 8: **Hedonic Coalition Formation**: A coalition formation game is classified as hedonic if [10]

1) *The gain of any player depends solely on the members of the coalition to which the player belongs.*
2) *The coalitions form as a result of the preferences of the players over their possible coalitions set.*

Definition 9: **Nash Stability**: A partition Π is said to be Nash stable if no player can benefit from moving from his coalition $S_\Pi(i)$ to another existing coalition S_k, i.e., $\forall i, S_\Pi(i) \succeq_i S_k \cup \{i\}$ for all $S_k \in \Pi \cup \{\emptyset\}$ [10].

Nash-stable partitions are immune even to those movements of individuals when a player who wants to change does not need permission to join an existing coalition [10].

Remark 1: In the literature ([10], [14]), the stability concepts being immune to individual deviation are *Nash stability, individual stability, contractual individual stability*. Nash stability is the strongest within above. Therefore, in this paper, we concentrate our analysis on the partitions

that are Nash-stable. Also, *core stability* is used in models where immunity to coalition deviation is required [14].

E. Properties of Preferences

The preference relation of a player can be defined over a *preference function*. Let us denote by $\pi_i : 2^N \rightarrow \mathbb{R}$ the preference function of player i. Thus, player i prefers the coalition S to T iff,

$$\pi_i(S) \geq \pi_i(T) \Leftrightarrow S \succeq_i T. \tag{38}$$

Furthermore, we are able to define the preference relation by means of a function which characterizes how a player prefers another player when they share the same coalition. In the following, we define this function. The preferences of player i is said to be *additively separable* if there exists a function $v_i : N \rightarrow \mathbb{R}$ such that $\forall S, T \subseteq N$

$$\sum_{j \in S} v_i(j) \geq \sum_{j \in T} v_i(j) \Leftrightarrow S \succeq_i T, \tag{39}$$

where we normalize by setting $v_i(i) = 0$ [10].

A profile of additively separable preferences, represented by $(v_i, \ldots, v_n)$, satisfies *symmetry* if $v_i(j) = v_j(i), \forall i, j$. Let us denote the following

$$\sum_{j \in S} v_i(j) \geq \sum_{j \in T} v_i(j) \Leftrightarrow \sum_{j \in S} v_i(j) = \sum_{j \in T} v_i(j) + \theta_i(S;T) \quad \text{if } \theta_i(S;T) \geq 0, \tag{40}$$

where θ can be considered as a slackness variable by which we determine the preference profile of the players. Moreover, it is immediate that $\theta_i(S;T) = -\theta_i(T;S)$.

F. An Algorithm for Hedonic Coalition Formation

In this paper, we adopt an algorithm from [19] for coalition formation that allows the players to make selfish decisions as to which coalitions they decide to join at any point in time. Each player chooses the best coalition in its own turn. This algorithm exploits the concepts of the hedonic game model.

In [19], a *switch rule* is defined which works as following:

Definition 10 (from [19]): **Switch rule**: Given a partition Π, player i decides to leave its current coalition $S_\Pi(i)$ and join to another coalition $S_k \in \Pi \cup \{\emptyset\}$, $S_k \neq S_\Pi(i)$, iff $S_k \cup \{i\} \succ_i S_\Pi(i)$.

For each partition Π, the switch rule provides a mechanism through which any player can leave its current coalition $S_\Pi(i)$, and join another coalition $S_k \in \Pi$, given that the new coalition $S_k \cup \{i\}$ is strictly preferred over $S_\Pi(i)$ through any preference function π_i [19]. We also suppose that when a player switches from one coalition to another one, it updates its history set H_i.

If the preferences of players result in a Nash-stable partition, it is proved in [19] that the switch rule always converges to a final partition composed of a number of disjoint coalitions and therefore, the hedonic coalition formation phase of the proposed algorithm is Nash-stable. For the proof, look at Theorem 1 and Proposition 2 of [19].

G. The Existence of Nash-stable Preferences

In [10], it is proved that if players' preferences are additively separable and symmetric, then a Nash stable coalition partition exists. So, in that case, the switch rule will always converge to a Nash-stable partition. For further discussion on additively separable and symmetric preferences, we refer to [11].

VIII. The Nash-Stable Core

This section presents a new approach to obtain preference profiles that give Nash-stable partitions. We develop a rule ensuring that such utility allocation method always produces a Nash-stable partition.

Let us assume that preference function of player i depends on the player gain, i.e., $\pi_i(\phi)$. We denote by $\mathcal{P}_N$, $\mathcal{P}_A$, and $\mathcal{P}_E$ the set of Nash-stable preferences[1], the additively separable and symmetric preferences, and the preferences occurring due to efficient allocation methods, respectively. We mentioned above that additively separable and symmetric preferences always result in a Nash-stable partition. Therefore, we are able to write that $\mathcal{P}_A \subset \mathcal{P}_N$. Look at Figure 4.

In the light of the above assumptions, let us now discuss the Nahs-stable core. First of all, by the Nash-stable core, we mean *the set of efficient allocation methods that give Nash-stable preferences*. Formally, we seek such efficient allocation methods that builds the following set,

$$\mathcal{C}_\mathcal{N} = \left\{ \phi \in \mathbb{R}^{n2^{n-1}} \,\middle|\, \mathcal{P}_N \cap \mathcal{P}_E \neq \emptyset \right\}. \tag{41}$$

[1]We call a preference as Nash-stable if it results in a Nash-stable partition.

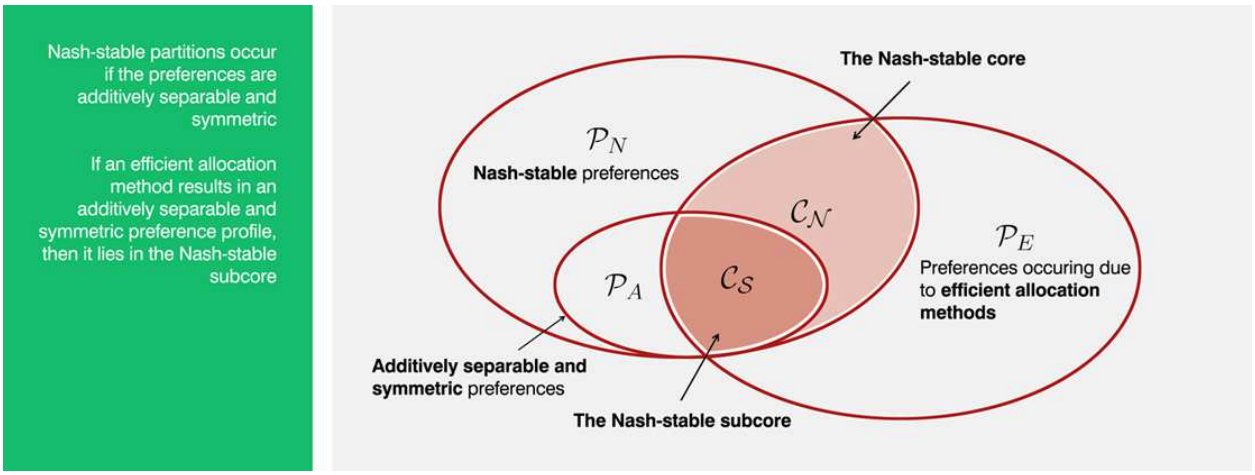


Fig. 4. The Nash-stable core.

Surely, the Nash-stable core becomes extremely large while the number of players increases, and consequently, to find an efficient allocation method is getting hard.

On the other hand, we can concentrate on the intersection of the set of additively separable and symmetric preferences and the set of preferences that occurs due to efficient allocation methods which is a subset of the Nash-stable core. To this end, the preference function has to be $\pi_i(S) = \sum_{j\in S} v_i(j)$. We name the set as *Nash-stable subcore* which is given by

$$\mathcal{C}_\mathcal{S} = \left\{ \phi \in \mathbb{R}^{n2^{n-1}} \middle| \, \mathcal{P}_A \cap \mathcal{P}_E \neq \emptyset \right\}. \tag{42}$$

In the following, we develop the rule how to find an efficient allocation method in $\mathcal{C}_S$.

Theorem 1: The Nash-stable subcore $\mathcal{C}_\mathcal{S}$ can be empty.

Proof: Due to the symmetry, we denote by $v_i(j) = v_j(i) = v(i,j), \forall i,j \in N$. Suppose that the utility of player being in coalition S which is denoted as ϕ_i^S can be expressed as

$$\phi_i^S = \delta_i^S + \sum_{j\in S} v_i(j), \tag{43}$$

where $\delta_i^S \geq u(i)$ can be interpreted as *the minimal utility* if player i is a member of coalition S. Thus, the preference function is represented as $\pi_i(\phi_i^S) = \phi_i^S - \delta_i^S$. We consider the efficiency, hence

$$\sum_{i\in S} \phi_i^S = u(S) = \sum_{i\in S} \delta_i^S + \sum_{i\in S}\sum_{j\in S} v_i(j), \tag{44}$$

which results in the following

$$\sum_{i\in S}\sum_{j\in S} v(i,j) = u(S) - \sum_{i\in S}\delta_i^S. \tag{45}$$

Algorithmically, if we write for all possible coalitions the above formula we have to solve the following linear program in order to obtain the values of variables $v(i,j)$ and δ_i:

$$\begin{aligned}(P)\quad \min \sum_{(i,j)\in N|i\neq j} v(i,j) + \sum_{S\in 2^N\setminus\{i\}}\sum_{i\in S}\delta_i^S \quad &\text{subject to}\\ \sum_{i\in S}\sum_{j\in S} v(i,j) + \sum_{i\in S}\delta_i^S = u(S), \quad &\forall S\in 2^N\setminus\{i\},\\ \delta_i^S \geq u(i), \quad &\forall i\in N, \forall S\in 2^N\setminus\{i\},\end{aligned} \tag{46}$$

where by $2^N\setminus\{i\}$ we remove those coalitions where players are alone from the collection of coalitions. In conclusion, if the above linear program (P) is not feasible then *the Nash-stable subcore is empty.* ■

A. Non-emptiness of the Nash-stable Core

However, we are able to find such a preference function that provides always a Nash-stable partition regardless of utility allocation method. Using the switch rule as the coalition formation algorithm, it can be done by enforcing[2] a player to obtain zero utility if the player would like to join to a coalition which is visited in its history set.

Theorem 2: If the preference function is chosen as following

$$\pi_i(S) = \begin{cases} \phi_i^S, & \textit{if } S\notin H_i,\\ 0, & \textit{otherwise}\end{cases} \tag{47}$$

then the partition obtained by switch rule is always Nash-stable. Thus, the Nash-stable core $\mathcal{C}_{\mathcal{N}}$ is nonempty.

Proof: In [19], Proposition 2 is proven under the condition that player i gets zero utility if it would like to visit a coalition being in its history set H_i. Therefore, *the Nash-stable core $\mathcal{C}_{\mathcal{N}}$ is always nonempty if the preference function of all players is chosen as in eq. (47).*

[2]Surely, it is valid only if all the players agree with such a condition.

Remark 2: Note that the utility allocation method ϕ in eq. (47) determines the preference relation of a player. Consequently, different allocation methods will produce different partitions. However, this does not change the result that Nash-stable core is nonempty.

■

IX. The Coalitional Switch off Game

In this section, we examine the cooperation of SPs in terms of hedonic coalition formation games. We denote by $\langle N, \succ, u\rangle$ the coalitional switch off game in which $N = (1, 2, \ldots, n)$ is the set of SPs, $\succ$ is the preference profile of SPs, and u is the utility function. First, we determine the utility function of cooperation, then we study the properties of it.

A. The Utility Function of Cooperation

Above, we mentioned that it is necessary to define a gain or cost function that characterizes the problem of cooperation. In our context, we need to analyze such a characteristic that should explain the total switch off gain, denoted by u, of a coalition. Precisely, we formalize this utility as in terms of maximization of energy saving density given in eq. (33), i.e.,

$$u(S) = \max_{q_S} G(S) \quad \text{subject to} \quad 0 \leq q_S \leq 1. \tag{48}$$

The physical meaning of the utility function is to measure the total gain when the switching off probability gives the global maximum of the energy saving density. Let us find the optimal value of q_S which can be calculated as

$$\frac{\partial G(S)}{\partial q_S} = -U_S + \left(\frac{\alpha}{2} - 1\right) q_S^{-\alpha/2} V_S = 0. \tag{49}$$

We know that the maximum of activation probability is $q_S \leq 1$, then the following gives the optimal value

$$q_S^* = \min\left\{ \left(\frac{\left(\frac{\alpha}{2} - 1\right) V_S}{U_S} \right)^{2/\alpha}, 1 \right\} \tag{50}$$

by which the utility function can be expressed as

$$u(S) = \begin{cases} U_S + V_S - \frac{V_S^{2/\alpha}}{U_S^{2/\alpha - 1}} \left(\frac{\alpha}{\alpha - 2}\right) \left(\frac{\alpha}{2} - 1\right)^{2/\alpha}, & \text{if } q_S^* < 1, \\ 0, & \text{if } q_S^* = 1. \end{cases} \tag{51}$$

Further, we could find the limit which guaranties that $u(S) > 0$,

$$\left(\frac{\left(\frac{\alpha}{2}-1\right)V_S}{U_S}\right)^{2/\alpha} < 1 \quad \Rightarrow \quad U_S > \left(\frac{\alpha}{2}-1\right)V_S. \tag{52}$$

What we infer from this result is that as long as energy saving density of operational power costs is higher than the total transmission energy saving multiplied by $\frac{\alpha}{2}-1$, there exists a non-zero utility of a typical coalition S.

Furthermore, recall that the allocation of the utility $u(S)$ to player i being in coalition S is denoted as $\phi_i(S)$. This gain corresponds to the energy saving allocated to player i. Thus, we say that player i obtains $\phi_i(S)$ gain when the BSs are activated by q_S of the joint network formed by coalition S.

B. Properties of the Utility Function

In the following, we enumerate the properties of the utility function of the coalitional switch off game.

Lemma 2: Monotonicity: The coalitional switch off game is not always monotonic.

Proof: Assume that there are two SPs, i.e. $S = (1, 2)$, and each SP has equal λ, P_0, and β as well as different traffics T_1, T_2. Also, suppose that $\alpha = 4$, $p = 0$ and $w = 1$. Then, we are able to find the following:

$$u(1) = \lambda P_0 + \beta T_1 - 2\sqrt{\lambda P_0 \beta T_1}, \tag{53}$$

$$u(1,2) = 2\lambda P_0 + \beta\left(T_1 + T_2\right) - 2\sqrt{2\lambda P_0 \beta\left(T_1 + T_2\right)}. \tag{54}$$

If we can prove that $u(1, 2) < u(1)$, then we could conclude that the monotonicity does not hold. To this end, let us denote the difference of these utilities as

$$\Delta = u(1,2) - u(1) = \lambda P_0 + \beta T_2 - 2\sqrt{2\lambda P_0 \beta\left(T_1 + T_2\right)} + 2\sqrt{\lambda P_0 \beta T_1}, \tag{55}$$

which means that if $\Delta < 0$, then the utility function has no monotonicity property. Assuming that $\lambda P_0 = 1$ and $\beta = 1$, let us look at the limit of this difference by converging the traffic of SP 1 to infinity,

$$\lim_{T_1 \to \infty} \Delta = \lim_{T_1 \to \infty} \left(1 + T_2 - 2\sqrt{2(T_1 + T_2)} + 2\sqrt{T_1}\right) = -\infty \tag{56}$$

Consequently, we are able to state that when traffic of SP 1 increases to high levels then the monotonicity might not hold. ■

We can conclude that the SPs have an incentive to deviate from grand coalition if they play the coalitional switch off game. Because, non-monotonicity implies that sometimes the utility might not increase when a player joins the game. Therefore, we come up with the coalition formation problem. We consider the hedonic approach to the coalition formation of SPs in this work.

Lemma 3: Non-superadditivity: The coalitional switch off game is not always superadditive.

Proof: We follow the same approach to evaluate the superadditivity property. The utility of SP 2 can be expressed as

$$u(2) = \lambda P_0 + \beta T_2 - 2\sqrt{\lambda P_0 \beta T_2}. \tag{57}$$

Thus, we determine the difference here as following:

$$\Delta = u(1,2) - [u(1) + u(2)], \tag{58}$$

by which we state that the utility function is non-superadditive if $\Delta < 0$. Under the assumptions $\lambda P_0 = 1$ and $\beta = 1$, the following can be obtained

$$\lim_{T_1 \to \infty} \Delta = \lim_{T_1 \to \infty} \left(2\left(\sqrt{T_1} + \sqrt{T_2}\right) - 2\sqrt{2(T_1 + T_2)} \right) = -\infty. \tag{59}$$

This achieves the result that superadditivity might not be valid considering the relative high traffic values of SP 1. ■

X. Example Scenario

In this section, we study an example scenario in which the introduced concepts are explained practically. We compare the results for different allocation methods.

Assume there are three SPs, $N = (1, 2, 3)$. Let the gain function yield the following results

for all possible coalitions

$$u(S_1) = 7.52 \times 10^{-1}, u(S_2) = 125.24 \times 10^{-1}, u(S_3) = 30.36 \times 10^{-1}, u(S_4) = 141.76 \times 10^{-1},$$
$$u(S_5) = 39.61 \times 10^{-1}, u(S_6) = 159.71 \times 10^{-1}, u(S_7) = 171.29 \times 10^{-1} \quad (60)$$

where $S_1 = (1)$, $S_2 = (2)$, $S_3 = (3)$, $S_4 = (1,2)$, $S_5 = (1,3)$, $S_6 = (2,3)$, $S_7 = (1,2,3)$. From these gains, we see that $u(S_7) < u(S_4) + u(S_3)$ meaning that the game is not superadditive. However, the utility function is monotonic. Because of non-superadditivity the grand coalition can not be set. Therefore, we state that the core of this game is empty. To be sure, the reason that the grand coalition is not possible is due to the fact that the players in S_4 deviates from the grand coalition because they can do better by leaving the grand coalition. On the other hand, in case of the hedonic behavior of the players, the grand coalition might occur. In the following, we have the results that players form the grand coalition.

A. Finding the Nash-stable Subcore

Here, we would like to obtain an efficient allocation method that will result in a Nash-stable partition. Clearly, we need a distribution method arranging the gains by such a way that the players will form a coalition formation which they will not deviate from.

The solution of the following linear program will give an allocation method that we need

$$\min \left(v(1,2) + v(1,3) + v(2,3) + \delta_1^{S_4} + \delta_2^{S_4} + \delta_1^{S_5} + \delta_3^{S_5} + \delta_2^{S_6} + \delta_3^{S_6} + \delta_1^{S_7} + \delta_2^{S_7} + \delta_3^{S_7}\right) \quad \text{subject to}$$
$$2v(1,2) + \delta_1^{S_4} + \delta_2^{S_4} = 141.76 \times 10^{-1},$$
$$2v(1,3) + \delta_1^{S_5} + \delta_3^{S_5} = 39.61 \times 10^{-1},$$
$$2v(2,3) + \delta_2^{S_6} + \delta_3^{S_6} = 159.71 \times 10^{-1},$$
$$2v(1,2) + 2v(1,3) + 2v(2,3) + \delta_1^{S_7} + \delta_2^{S_7} + \delta_3^{S_7} = 171.29 \times 10^{-1},$$
$$\delta_1^{S_4} \geq 7.52 \times 10^{-1}, \delta_2^{S_4} \geq 125.24 \times 10^{-1}, \delta_1^{S_5} \geq 7.52 \times 10^{-1}, \delta_3^{S_5} \geq 30.36 \times 10^{-1},$$
$$\delta_2^{S_6} \geq 125.24 \times 10^{-1}, \delta_3^{S_6} \geq 30.36 \times 10^{-1}, \delta_1^{S_7} \geq 7.52 \times 10^{-1}, \delta_2^{S_7} \geq 125.24 \times 10^{-1}, \delta_3^{S_7} \geq 30.36 \times 10^{-1}, \quad (61)$$

where the following optimum values are obtained

$$v(1,2) = 3.388 \times 10^{-1}, v(1,3) = -0.246 \times 10^{-1}, v(2,3) = 0.943 \times 10^{-1},$$
$$\delta_1^{S_4} = 8.631 \times 10^{-1}, \delta_2^{S_4} = 126.351 \times 10^{-1}, \delta_1^{S_5} = 8.631 \times 10^{-1}, \delta_3^{S_5} = 31.471 \times 10^{-1},$$
$$\delta_2^{S_6} = 126.351 \times 10^{-1}, \delta_3^{S_6} = 31.471 \times 10^{-1}, \delta_1^{S_7} = 7.52 \times 10^{-1}, \delta_2^{S_7} = 125.24 \times 10^{-1}, \delta_3^{S_7} = 30.36 \times 10^{-1}. \tag{62}$$

Now, let us determine the preference profile according to those values. We first need to denote the slackness variables in terms of $v(i,j)$,

$$\theta_1(S_4, S_1) = v(1,2) = 3.388 \times 10^{-1}, \theta_1(S_5, S_1) = v(1,3) = -0.246 \times 10^{-1},$$
$$\theta_1(S_7, S_1) = v(1,2) + v(1,3) = 3.142 \times 10^{-1}, \theta_1(S_7, S_4) = v(1,3) = -0.246 \times 10^{-1},$$
$$\theta_1(S_7, S_5) = v(1,2) = 3.388 \times 10^{-1}, \theta_1(S_4, S_5) = v(1,2) - v(1,3) = 3.634 \times 10^{-1}, \tag{63}$$

$$\theta_2(S_4, S_2) = v(1,2) = 3.388 \times 10^{-1}, \theta_2(S_6, S_2) = v(2,3) = 0.943 \times 10^{-1},$$
$$\theta_2(S_7, S_2) = v(1,2) + v(2,3) = 4.331 \times 10^{-1}, \theta_2(S_7, S_4) = v(2,3) = 0.943 \times 10^{-1},$$
$$\theta_2(S_7, S_6) = v(1,2) = 3.388 \times 10^{-1}, \theta_2(S_4, S_6) = v(1,2) - v(2,3) = 2.445 \times 10^{-1}, \tag{64}$$

$$\theta_3(S_5, S_3) = v(1,3) = -0.246 \times 10^{-1}, \theta_3(S_6, S_3) = v(2,3) = 0.943 \times 10^{-1},$$
$$\theta_3(S_7, S_3) = v(1,3) + v(2,3) = 0.697 \times 10^{-1}, \theta_3(S_7, S_5) = v(2,3) = 0.943 \times 10^{-1},$$
$$\theta_3(S_7, S_6) = v(1,3) = -0.246 \times 10^{-1}, \theta_3(S_5, S_6) = v(1,3) - v(2,3) = -1.189 \times 10^{-1}. \tag{65}$$

Using these values, the preference relation of each player is given by

$$S_4 \succ_1 S_1, S_1 \succ_1 S_5, S_7 \succ_1 S_1, S_4 \succ_1 S_7, S_7 \succ_1 S_5, S_4 \succ_1 S_5,$$
$$S_4 \succ_2 S_2, S_6 \succ_2 S_2, S_7 \succ_2 S_2, S_7 \succ_2 S_4, S_7 \succ_2 S_6, S_4 \succ_2 S_6,$$
$$S_3 \succ_3 S_5, S_6 \succ_3 S_3, S_7 \succ_3 S_3, S_7 \succ_3 S_5, S_6 \succ_3 S_7, S_6 \succ_3 S_5. \tag{66}$$

From the preference relations, the following preference profile is achieved

$$S_4 \succ_1 S_7 \succ_1 S_1 \succ_1 S_5$$
$$S_7 \succ_2 S_4 \succ_2 S_6 \succ_2 S_2$$
$$S_6 \succ_3 S_7 \succ_3 S_3 \succ_3 S_5 \tag{67}$$

which results in the Nash-stable partition $\Pi = \{S_7\}$. This partition is the best one for each player from which none deviates. Let us now calculate the utilities,

$$\phi_1^{S_7} = 7.52 \times 10^{-1} + 3.388 \times 10^{-1} - 0.246 \times 10^{-1} = 10.662 \times 10^{-1},$$
$$\phi_2^{S_7} = 125.24 \times 10^{-1} + 3.388 \times 10^{-1} + 0.943 \times 10^{-1} = 129.571 \times 10^{-1},$$
$$\phi_3^{S_7} = 30.36 \times 10^{-1} - 0.246 \times 10^{-1} + 0.943 \times 10^{-1} = 31.057 \times 10^{-1}. \quad (68)$$

Note that SP 2 makes the most profit in that setting. It is also interesting to observe that the grand coalition is the Nash-stable partition in the hedonic setting. However, above, we have the result that in a non-hedonic behavior, the grand coalition can not be reached.

B. A Solution from the Nash-stable Core

We find a Nash-stable partition using eq. (47). Suppose that the preference function is given as

$$\pi_i(S) = \begin{cases} \frac{u(S)}{|S|}, & \text{if } S \notin H_i, \\ 0, & \text{otherwise} \end{cases} \quad (69)$$

where the gain of each player in a coalition is equal. Let the initial partition be $\Pi_0 = \{(1), (2), (3)\}$ in which each player is alone. Initially, the history set of each player contains the empty set, i.e., $H_1 = \{(\emptyset)\}, H_2 = \{(\emptyset)\}, H_3 = \{(\emptyset)\}$. This means that every player joins the game. So, the resulted partition step by step is obtained as follows

Step	Player	Partition	Utility	History Set
1.	SP 1	$\Pi_1 = \{(1,2),(3)\}$	$\pi_1(S_4) = \frac{141.76\times10^{-1}}{2}$	$H_1 = \{(\emptyset),(1)\}$
2.	SP 2	$\Pi_2 = \{(2,3),(1)\}$	$\pi_2(S_6) = \frac{159.71\times10^{-1}}{2}$	$H_2 = \{(\emptyset),(1,2)\}$
3.	SP 3	$\Pi_3 = \{(2,3),(1)\}$	$\pi_3(S_6) = \frac{159.71\times10^{-1}}{2}$	$H_3 = \{(\emptyset)\}$
4.	SP 1	$\Pi_4 = \{(1,2,3)\}$	$\pi_1(S_7) = \frac{171.29\times10^{-1}}{3}$	$H_1 = \{(\emptyset),(1)\}$
5.	SP 2	$\Pi_5 = \{(1,2,3)\}$	$\pi_2(S_7) = \frac{171.29\times10^{-1}}{3}$	$H_2 = \{(\emptyset),(1,2)\}$
6.	SP 3	$\Pi_6 = \{(1,2,3)\}$	$\pi_3(S_7) = \frac{171.29\times10^{-1}}{3}$	$H_3 = \{(\emptyset)\}$

Notice that in step 1, SP 1 joins SP 2 and updates its own history set as $H_1 = \{(\emptyset)\} \rightarrow H_1 = \{(\emptyset),(1)\}$. In step 2, SP 2 leaves SP 1 and joins SP 3. Actually, SP 2 can do better by staying alone but it is forbidden because in its history set the coalition (2) is registered. So its history set is updated as $H_2 = \{(\emptyset)\} \rightarrow H_2 = \{(\emptyset),(1,2)\}$. Then, in step 3, SP 3 does not leave the

coalition $(2,3)$ because it is the best coalition for itself. In step 4, SP 1 does better by joining the coalition $(2,3)$. In step 5, SP 2 has to keep staying in coalition $(1,2,3)$ because, otherwise it will gain zero. SP 3 also can not change its position in step 6. Consequently, we obtain the partition from which players do not deviate. Thus, the Nash-stable partition arises to be $\Pi = \{S_7\}$.

Furthermore, the allocation of utility in such an allocation method (equal sharing the utility) is seen to be unfair. Nonetheless, we would choose a fairer allocation method such as Shapley value [20]. Clearly, that option might produce a different Nash-stable partition.

XI. Conclusion

We analyzed the cooperation of SPs on switch off operation of BSs in the context of green networking. The homogenous Poisson p.p. approach to the deployment of BSs has been used in order to study the SINR distribution of SPs. It was proven that scaling the coordinates of $\mathbb{R}^2$ by $\sqrt{q}$ from the origin of a homogenous Poisson point process result in a thinned homogenous Poisson point process with intensity modified by q. The SINR distribution of the original network was derived and by increasing the transmission power by some factor of q, it was proven that the SINR distribution of the thinned network (obtained by scaling the locations of BSs) remains unchanged. Furthermore, in the case of non-cooperating SPs, the SINR distribution is obtained of the original and thinned network of SPs, respectively. We also found the SINR distribution of cooperation case used in the context of coalition formation of SPs. The operations on the network formed by cooperation are assumed to be run jointly by SPs meaning that they share their resources such that any mobile is tagged to the nearest BS of any SP. The maximal energy saving density of a cooperation is supposed to be the utility of the coalition. We derive the closed form results of the utility.

We also introduced a novel approach to the core of coalition formation games called the Nash-stable core including those gain allocation methods that result in Nash-stable partitions by which it is always guaranteed Nash stability. Being a subset of the Nash-stable core, the Nash-stable subcore was introduced. We argued in which case it is non-empty as well as proved the rule how to obtain an allocation method that provides the Nash-stable preference profile. Furthermore, assuming the choice of a coalition is performed only by one player in a point of time, we proved that the Nash-stable core is always non-empty when a player chooses its coalition in its turn, the player has zero utility if the chosen coalition is in its history set. In an

example scenario, we explained practically these novel concepts.

REFERENCES

[1] http://searchnetworking.techtarget.com/

[2] N. Chilamkurti, S. Zeadally, and F. Mentiplay, "Green networking for major components of information communication technology systems," *EURASIP Journal on Wireless Communications and Networking*, vol.2009, no.35, Jan. 2009.

[3] E. Altman, M. K. Hanawal, R. El-Azouzi, and S. Shamai, "Tradeoffs in green cellular networks," *GreenMetrics Workshop, held in conjunction with SIGMETRICS*, San Jose, USA, Jun. 2011.

[4] E. Altman, C. Hasan, J. M. Gorce, and L. Roullet, "Green networking: Downlink considerations," *NETGCOOP 2011*, Paris, France, Oct. 2011.

[5] J. G. Andrews, F. Bacelli, and R. K. Ganti, "A tractable approach to coverage and rate in cellular networks," *IEEE Trans. on Commun.*, vol.59, no.11, pp.3122–3134, Nov. 2011

[6] O. Arnold, F. Richter, G. Fettweis, and O. Blume, "Power consumption modeling of different base station types in heterogeneous cellular networks," *Future Network and Mobile Summit 2010 Conference Proceedings*, 2010.

[7] G. Auer, V. Giannini, I. Godor, P. Skillermark, M. Olsson, M.A. Imran, D. Sabella, M. J. Gonzalez, C. Desset, and O. Blume, "Cellular energy efficiency evaluation framework," *IEEE VTC Spring*, 2011, pp.1–6, May 2011

[8] C. Desset, B. Debaillie, V. Giannini, A. Fehske, G. Auer, H. Holtkamp, W. Wajda, D. Sabella, F. Richter, M. J. Gonzalez, H. Klessig, I. Godor, M. Olsson, M. A. Imran, A. Ambrosy, O. Blume, "Flexible power modeling of LTE base stations," *IEEE WCNC*, pp.2858–2862, Apr. 2012.

[9] B. Peleg and P. Südholter. *Introduction to the Theory of Cooperative Games*. Second Edition. Springer-Verlag, 2007.

[10] A. Bogomonlaia and M. Jackson, "The stability of hedonic coalition structures," *Games and Economic Behavior*, vol.38, pp.201–230, Jan. 2002.

[11] N. Burani, and W. S. Zwicker, "Coalition formation games with separable preferences," *Mathematical Social Sciences, Elsevier*, vol.45 no.1, p.p.27–52, Feb. 2003.

[12] W. Saad, Z. Han, M. Debbah, A. Hjørungnes, and T. Başar, "Coalitional game theory for communication networks: A tutorial," *IEEE Signal Processing Magazine*, Special Issue on Game Theory, vol.26, no.5, pp. 77–97, Sept. 2009.

[13] J. Drèze and J. Greenberg, "Hedonic coalitions: Optimality and stability," *Econometrica*, vol.48, pp.987–1003, Jan. 1980.

[14] J. Hajduková, "Coalition formation games: A survey," *International Game Theory Review*, vol.8, no.4, pp.613-641, 2006.

[15] R. J. Aumann and B. Peleg, "Von neumann-morgenstern solutions to cooperative games without side payments," *Bull. Amer. Math. Soc.*, vol.6, no.3, pp.173-179, 1960.

[16] K. R. Apt and A. Witzel. "A generic approach to coalition formation," *International Game Theory Review*, vol.11, no.3, pp.347–367, 2009.

[17] F. Baccelli, and B. Błaszczyszyn. "Stochastic geometry and wireless networks: volume I theory," *Foundations and Trends in Networking*, vol.3, pp.249–449, 2009.

[18] M. Haenggi, J. G. Andrews, F. Baccelli, O. Dousse, and M. Franceschetti, "Stochastic geometry and random graphs for the analysis and design of wireless networks," *IEEE Journal on Selected Areas in Communications*, vol.27, pp.1029–1046, Sept. 2009.

[19] W. Saad, Z. Han, T. Başar, M. Debbah, and A. Hjorungnes, "Hedonic coalition formation for distributed task allocation among wireless agents," *IEEE Trans. on Mobile Computing*, vol.10, no.9, pp.1327–1344, Sept. 2011

[20] L. S. Shapley, "A value for n-person games," *Annals of Mathematics Study*, vol.28, pp.307–317, 1953.